

PERFORMANCE DATA SHEET

This filtration system has been tested and certified according to NSF/ANSI Standard 42 by NSF for the reduction of the substances listed below, as verified and substantiated by test data. The concentration of the indicated substances in the water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI Standard 42. Please see warranty for manufacturer's limited warranty.

NSF/ANSI Standard 42 Aesthetic Effects

Substance	Taste and Odor, Aesthetic Chlorine
Influent Challenge Concentration (mg/liter unless specified)	2 mg
US EPA Maximum Permissible Water Concentration/% Reduction	1 mg / 50%
Actual Minimum Percent Reduction	96%
Actual Average Percent Reduction	97.3%

Substance	Influent Challenge Concentration	Reduction Requirement
Chlorine	2.0 mg/L \pm 10%	50%

Operating Requirements:

- Filter System capacity 25,000 gallons

Operating Temperature:

- Minimum 40°F/4°C – Max 100°F/38°C

Laboratory Test Conditions: pH: 6.5 – 8.5,

Water Temperature: 72°F/23°C – 75°F/24°C. Actual performance may vary with local water conditions.

CAUTION

- Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.
- This unit is not designed to filter sulfur (rotten egg odor). Use of carbon filters to treat sulfur may intensify taste/odor problems.
- Please comply with all state and local regulations regarding the installation of water treatment devices.
- The contaminants or other substances reduced by the water filter device are not necessarily in your water.

CLEAN & PURE®

PRODUCT WARRANTY
P3060 Maintenance
Free Countertop Filter
FOR COLD WATER USE ONLY.



LIMITED WARRANTY

Paragon Water Systems, Inc. warrants to the owner of this product, for a period of 90 days from the date of purchase, that it is free from defects in material and workmanship and agrees it will, at its' option, either repair the defect or replace the defective product or part thereof at no charge to the purchaser for parts and labor.

If within 90 days from the date of purchase the product proves to be defective for any reason, return it postpaid to Paragon Water Systems, Inc. at the address below, for repair or replacement at no charge.

This warranty does not apply to any product the exterior of which has been damaged or defaced, which has been subjected to commercial usage, misuse, abnormal service or handling, or which has been altered or modified in design or construction.

Paragon Water Systems, Inc.

14001 – 63rd Way N., Clearwater, FL 33760

(727) 538-4704

www.clearwaterusa.com



Tested & Certified by NSF against NSF/ANSI Standard 42 for the aesthetic reduction of chlorine taste and odor.

PURCHASED FROM

DATE OF PURCHASE

CLEAN & PURE®

P3060
Maintenance Free
Countertop Filter



14001 – 63rd Way N.
Clearwater, FL 33760

(727) 538-4704

www.clearwaterusa.com

CLEAN
& PURE®


P3060 Maintenance Free Countertop Filter

Congratulations! You have just taken the first step to assure your family of maintenance free, quality water. This filter is a fashionable accessory to go with any kitchen décor. Some highlights of this model include:



- It is maintenance free! There are no filters to change or any adjustments needed during the life of this filter.
- It is designed to filter out chlorine, bad taste and odor for up to 25,000 gallons under normal household use.
- The unit contains premium grade granular activated carbon and KDF, a premium drinking water treatment media designed to keep the filter clean and long lasting.
- After becoming accustomed to drinking clean water, you will be able to tell when the filter is nearing its' renewal point by a noticeable drop in water pressure or by tasting or smelling chlorine or other elements normally contained in tap water. At that point, you should replace the unit.

PARTS INCLUDED


- A – Spout
- B – Filter Housing
- C – Bypass Control
- D – Diverter Valve
- E – Hose
- G – Adaptor
- H – Washer

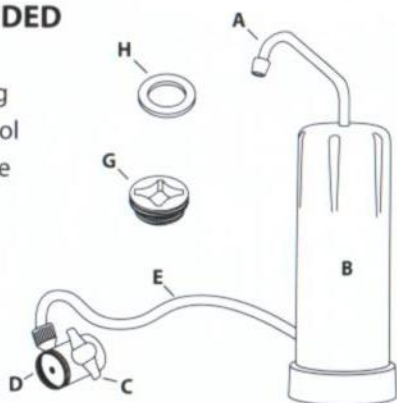

FAUCET

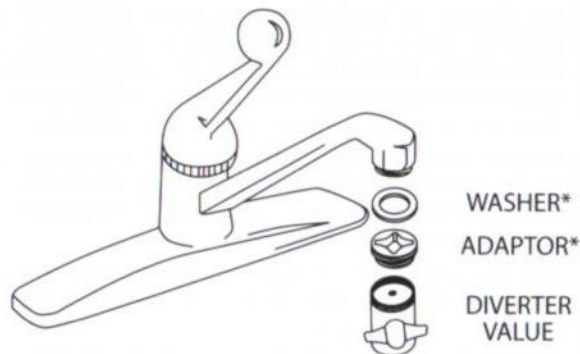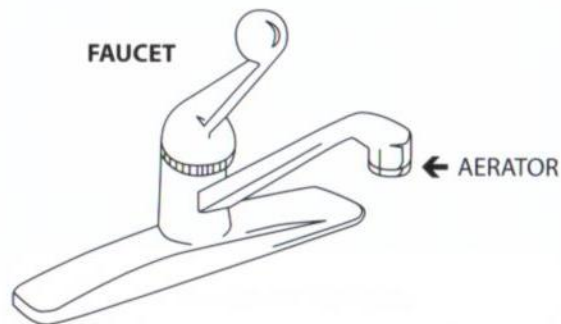

*OPTIONAL, IF NECESSARY.

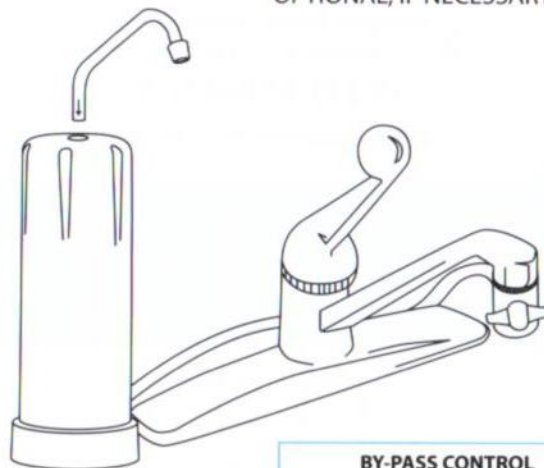

BY-PASS CONTROL



FILTERED



NON-FILTERED

INSTALLATION STEPS

1. Remove aerator from faucet.
2. Replace with diverter valve. Tighten top collar with pliers to ensure good leak-free seal. NOTE: If the diverter valve does not fit your faucet, use the supplied adaptor and washer or obtain the proper adaptor at your local hardware store. If diverter valve leaks just below upper rotating collar, replace existing washer with supplied washer, or obtain a thicker washer from your local hardware store or contact Paragon Water for assistance.
3. Push double O-ring end of spout into hole in the top of the filter housing. Turn spout so it is over sink.
4. Turn on cold water at the faucet.
5. Turn bypass control on diverter valve.
6. Run water through unit for **30 minutes** to purge entrapped air and carbon fines from the unit.
7. Toggle the bypass control to select filtered or non-filtered water.

OPERATING SPECIFICATIONS

Rated service Flow – 0.5 gpm (1.9 lpm)

Rated Capacity – 25,000 gallons

Operating Pressure – 20 - 100 psi (1.4 - 6.9 bar)

Operating Temperature – 40 - 100° F (4 - 38° C)

PRECAUTIONS

Do not attempt to filter hot water. If hot water is accidentally run through filter, immediately flush system with cold water for a minimum of 15 seconds. Installation of the filter must comply with existing state and local plumbing codes. Some filters are not intended for use where water is microbiologically unsafe or of unknown quality without adequate disinfection to the water being treated by the unit. Do not install in direct sunlight. Protect from freezing.

OPERATION/MAINTENANCE DATA

These units are intended for non-commercial use. They should be used only in ambient air temperature of between 40°F/4°C and 100°F/38°C. Placement of these units in direct sunlight or use of electrical heating equipment on these units must be avoided.

INSTRUCTIONS FOR USE

To toggle between your new P3060 Maintenance Free Countertop Filter and straight tap water, simply turn the knob on the diverter valve.